



Laptop computer

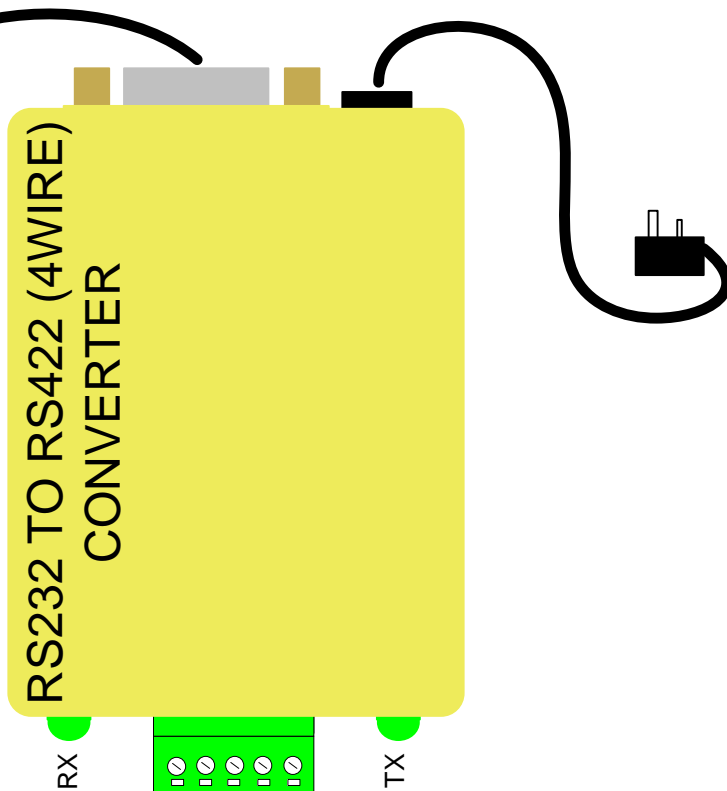

USE RS485 PORT TO PROGRAM MATRIX

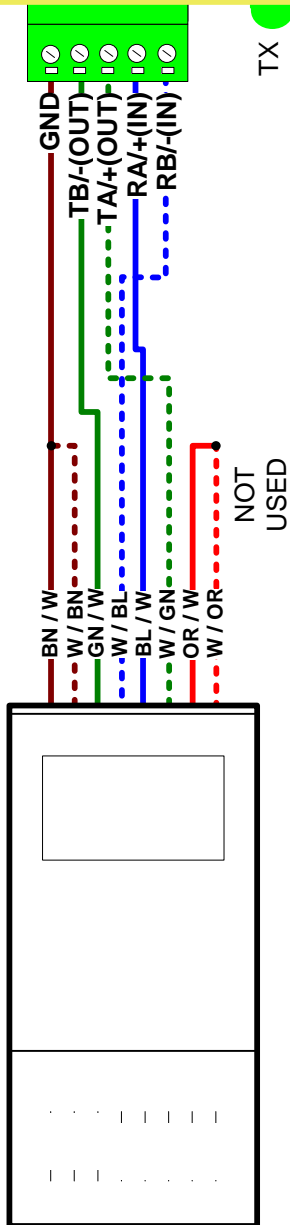

Building Block Video Ltd (Tx1500 up down GUI v1.1, 04 01 08 KG)

17 Apex Park, Diplocks Industrial Estate, Hailsham, East Sussex, UK. BN27 3JU.

Tel:+44(0)1323 842727 Fax:+44 (0)1323 842728 Support:+44(0)1323 444600 www.bbvccv.com



## Installing the Graphical User Interface

- 1) Insert the CD
- 2) Extract and save all files to a new folder on your desktop
- 3) Run Setup.exe

## To Download

\* Please ensure monitor one is selected on TX1500

- 1) Press and hold Program on TX1500 Keyboard
- 2) Enter password (default 999999)
- 3) Select Set Passwords (use + key to select)
- 4) Open GUI on computer
- 5) Select UPLOAD/DOWNLOAD tab
- 6) Click Download TX1500 Settings
- 7) Select Download in the matrix menu
- 8) When prompted press + on TX1500 Keyboard.
- 9) When Download Complete Select Save Settings and save to a folder.
- 10) Exit matrix menu

## To Upload

- 1) Open GUI on computer
- 2) In Camera Menu Select Use custom Camera Names, Yes.
- 3) Enter Camera text to be uploaded in "Camera Title" box
- 4) Repeat for each camera required. ( select camera's by using left/right arrow)
- 5) In the GUI select the UPLOAD/DOWNLOAD tab
- 6) Enter the TX1500's Programming Menu
- 7) Select Set Password
- 8) Select Upload
- 9) Select Upload TX1500 Settings in GUI
- 10) When Prompted Press + on TX1500 Keyboard.
- 11) Exit TX1500 Programming menu

